



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se



Sidomonterade Nivåvakter Serie FF

Process Center AB
Skogsbrynsvägen 8 C
236 31 Höllviken
040 452900 info@processcenter.se



Sidomonterade Nivåvakter Serie FF

www.processcenter.se

INTRODUCTION

WORKING PRINCIPLE

The reed switch relies on two basic scientific principles namely: buoyancy and magnetism.

Buoyancy causes the float (which contains a magnet) to rise with the liquid and magnetism helps open and close the switch.


A change in liquid levels raises or lowers the float up or down. The end of the pivot arm (non float side) contains a permanent magnet that can repel the switch magnet (inside the stationary 'stem' of the entire structure).

When the float magnet moves close to the switch's stationary stem, the float magnet repels the switch magnet which either opens or closes the Electrical circuit.


FEATURES

The side mounted float level sensor (FF series) are manufactured specifically for horizontal mounting on tanks or vessels. They work well as high or low level controls.

1. Both Micro-Switch types and Reed Switches are available. The MicroSwitch type is usable even at ambient temperatures of 100° C maximum.
2. Mounting flanges are custom-made. (JIS, DIN,ANSI).
3. A wide variety of floats for different solution's specific gravities (S.G.) are available.
4. Wetted parts material ranges from plastics, stainless steel, anti-corrosive and explosion proof types.

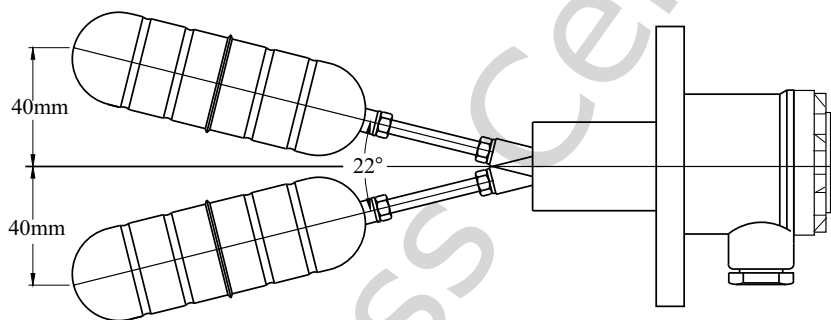

WIRING



REED SWITCH ---- 1A, 30W 220Vac/200Vdc (FF20, 45, 55, 8□)
MICRO SWITCH ---- 5A/250Vac



Sidomonterade Nivåvakter Serie FF

www.processcenter.se

CONFIGURATION DIAGRAMS

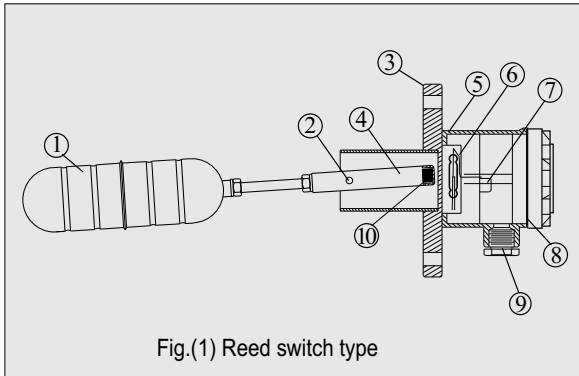


Fig.(1) Reed switch type

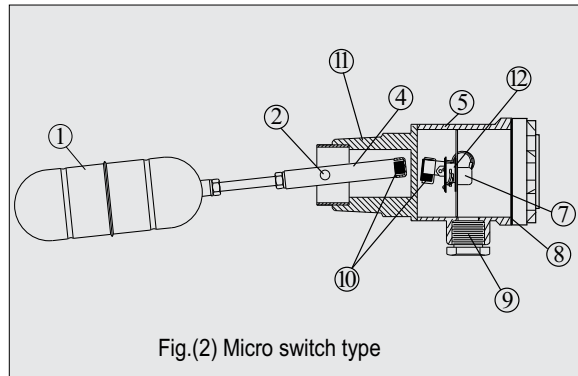



Fig.(2) Micro switch type

- | | | | |
|--------------------|----------------|-------------|-----------------|
| 1. Float | 4. Pivot | 7. Terminal | 10. Magnet |
| 2. Shaft | 5. Housing | 8. O-ring | 11. Screw |
| 3. Flange | 6. Reed Switch | 9. Conduit | 12. Microswitch |
| Conduit/Connection | | | |

► The diameter and length of the connecting pipe (of a tank) are in direct proportion.

UNIT: mm

Pipe dia. (A)	45-50	50-55	55-60	60-65	65-70
Length (B) (Max.)	130	140	150	160	170

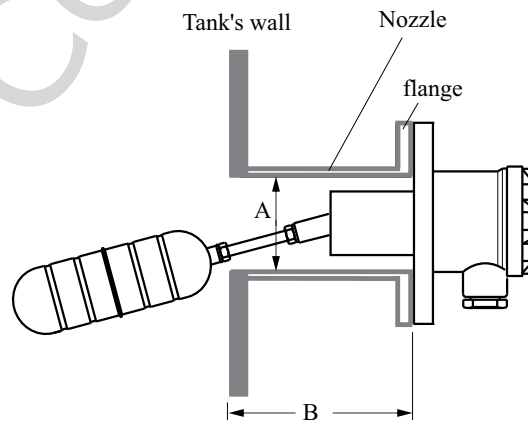



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

SPECIFICATIONS



MODEL	SPEC.	Operating Temp.	Electrical Contact	Contact Capacity	Contact Element	Housing Spec.	Applicable S.G.
FF10BHM		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.25
FF10CEM		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.65
FF10CEQ		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.65
FF10CLO		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.65
FF10DFM		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.55
FF10DFQ		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.55
FF15HEQ		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	SUS304 IP65	0.8
FF12CEM		-40°C~100°C	SPDT(1C)X2	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.65
FF20BHM		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.25
FF20CEM		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.65
FF20CEQ		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.65
FF20DFM		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.55
FF20DFQ		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.55
FF20DLO		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.55

※ Above-mentioned models are approved by class societies : DNV 、 LR 、 GL 、 BV 、 ABS 。



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

SPECIFICATIONS



MODEL	SPEC.	Operating Temp.	Electrical Contact	Contact Capacity	Contact Element	Housing Spec.	Applicable S.G.
FF40DFM		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.55
FF45DFM		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed Switch	Aluminum Alloy IP65	0.55
FF50DFM		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.55
FF55DFM		-40°C~200°C	SPDT(1C)	1A, 60W 220Vac/200Vdc	Reed switch	Aluminum Alloy IP65	0.55
FF70/71BHM		-20°C~100°C	SPDT(1C)	3A/250Vac	Microswitch	SUS316 Ex d IIC T3~T6	0.25
FF70/71CFM		-20°C~100°C	SPDT(1C)	3A/250Vac	Microswitch	SUS316 Ex d IIC T3~T6	0.65
FF70/71DFM		-20°C~100°C	SPDT(1C)	3A/250Vac	Microswitch	SUS316 Ex d IIC T3~T6	0.55
FF73GLO		-20°C~100°C	SPDT(1C)	3A/250Vac	Microswitch	SUS316 Ex d IIC T3~T6	0.7
FF75DFM		-20°C~100°C	SPDT(1C)	3A/250Vac	Microswitch	SUS316 Ex d IIC T3~T6	0.55
FF90CLO		-20°C~100°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.65

※ Above-mentioned models are approved by class societies : DNV 、 LR 、 GL 、 BV 、 ABS 。

MODEL	SPEC.	Operating Temp.	Electrical Contact	Contact Capacity	Contact Element	Housing Spec.	Applicable S.G.
FF30A3Q		-20°C~100°C	SPST(1A)	1A, 50W 240Vac/200Vdc	Reed Switch	SUS304 IP65	0.65
FF62DFM		-40°C~350°C	SPDT(1C)	5A/250Vac	Microswitch	Aluminum Alloy IP65	0.55
FF80EFM		-20°C~80°C	SPDT(1C)	1A, 30W 220Vac/200Vdc	Reed switch	PC IP65	0.60
FF81E		-20°C~80°C	SPDT(1C)	1A, 30W 220Vac/200Vdc	Reed switch	—	0.60



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

MODELS


Order No. F F

Connecting (Refer to p11)


Float

10: Single Switch


12: Dual Switch

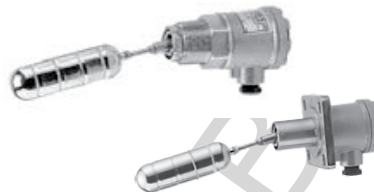


► Order No. FF10BHM

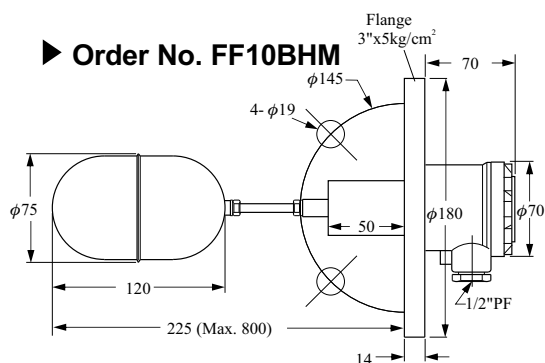


► Order No. FF10CEM

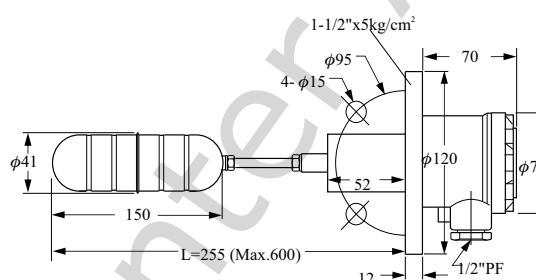


► Order No. FF10CLO

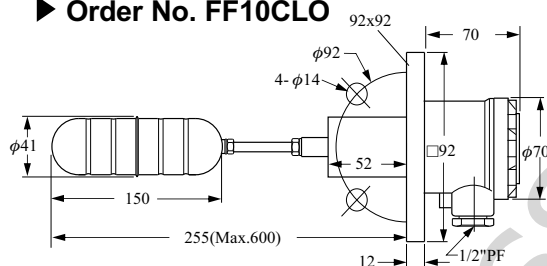


► Order No. FF10CEQ

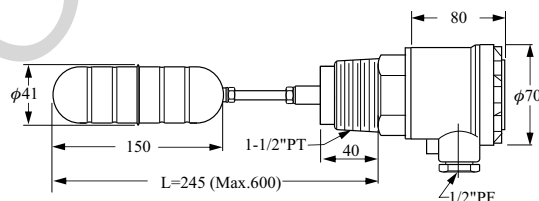


► Order No. FF10DFM

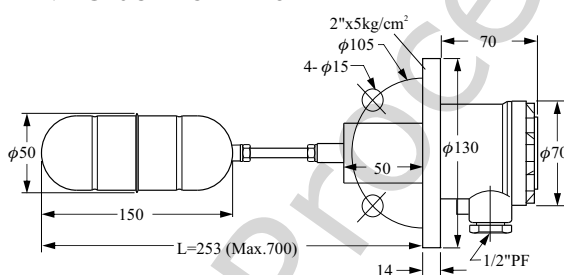


► Order No. FF10DFQ

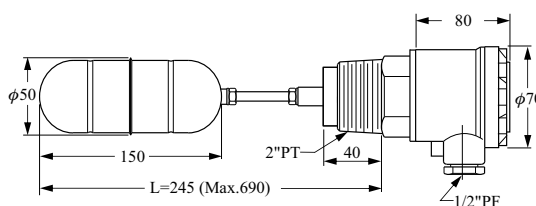

► Order No. FF15HEQ

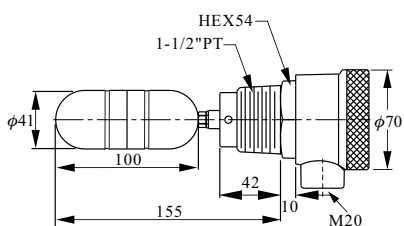

► Order No. FF12CEM

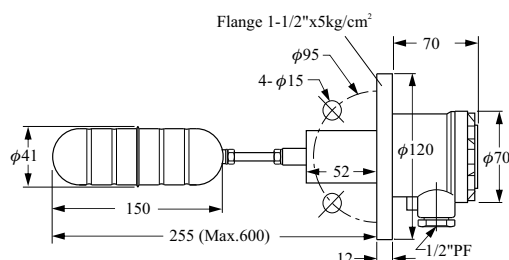



Process Center AB


Sidomonterade Nivåvakter Serie FF

www.processcenter.se


HIGH TEMPERATURE

Order No. FF20 ☐ ☐


Connection
(Refer to p11)
Float

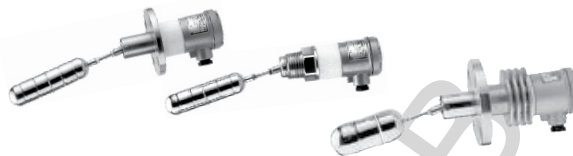


► Order No. FF20BHM

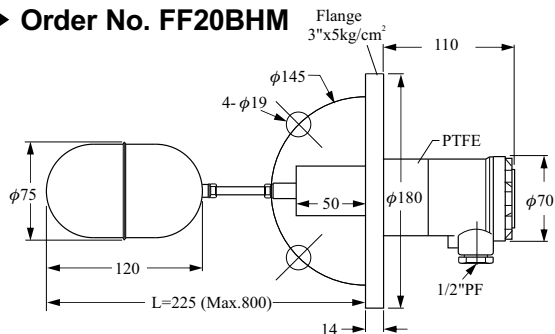


► Order No. FF20CEM

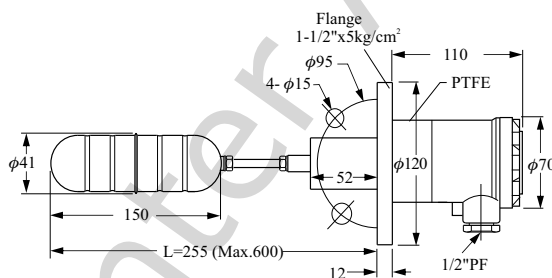


► Order No. FF20CEQ

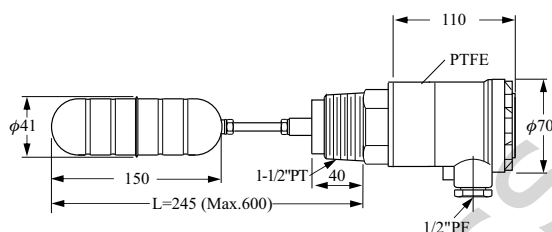


► Order No. FF20DFM

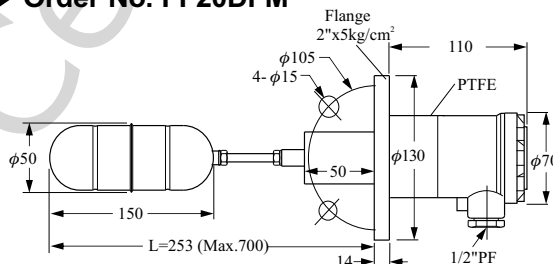


► Order No. FF20DLO

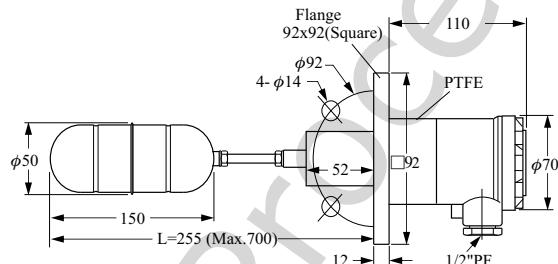

► Order No. FF20DFQ

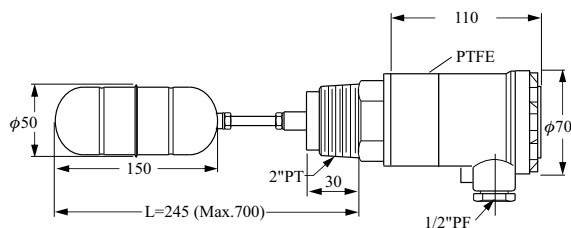

► Order No. FF62DFM

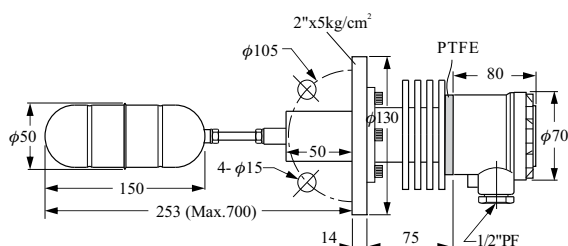



Process Center AB


Sidomonterade Nivåvakter Serie FF

www.processcenter.se


Order No. F F

Connecting (Refer to page 11)
Float
30: Mini Type
40: Double Angle Standard
45: Double Angle High Temperature
50: Vertical Standard
55: Vertical High Temperature


► Order No. FF40DFM

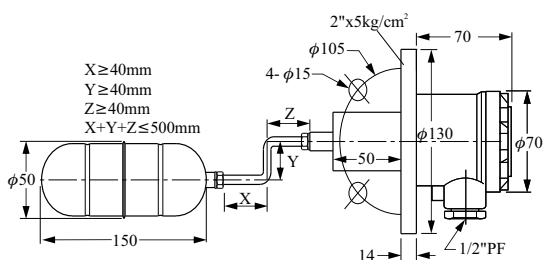


► Order No. FF50DFM

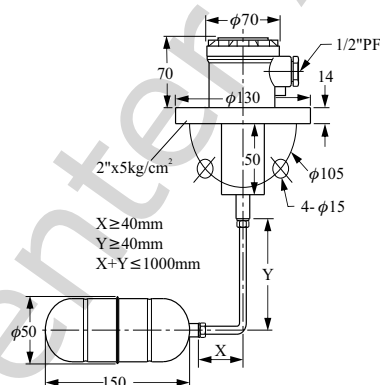


► Order No. FF45DFM

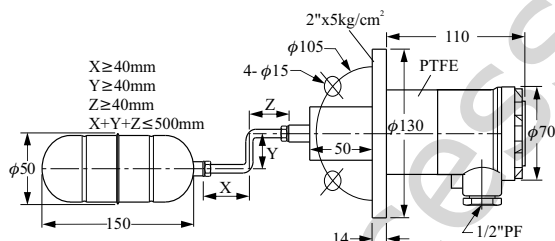

► Order No. FF55DFM

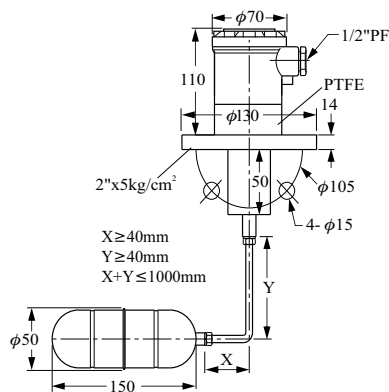

► Order No. FF30A3Q

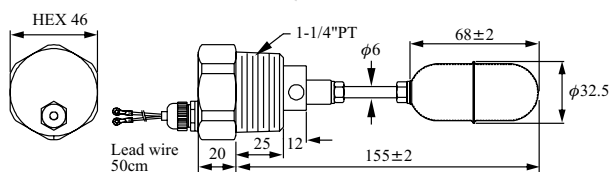

Process Center AB
Skogsbrynsvägen 8 C
236 31 Höllviken
040 452900 info@processcenter.se



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

ANTI-CORROSIVE MODELS


FF80EFM --- PC Housing

FF81E --- Without Housing


Wetted parts : P.P.

Cable spec. : PVC 3x0.75 mm²

► Order No. FF80EFM

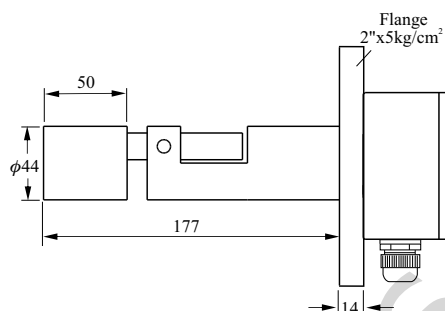

► Order No. FF81E

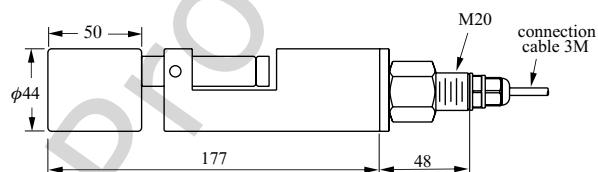




Sidomonterade Nivåvakter Serie FF

www.processcenter.se


SQUARE FLANGE & TEST ACCESORIES

► Order No. FF90CLO

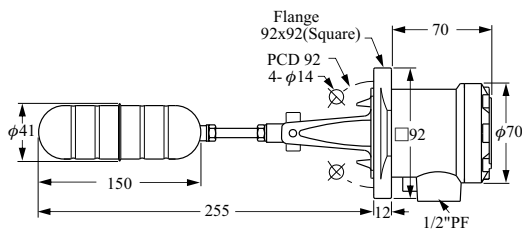

1. Housing material: Aluminum (IP65)
2. Suitable S.G.: >0.65
3. Operation temp.: -20~100°C
4. Contact mode: SPDT(1C)
5. Contact rating: 5A/250Vac
6. Operation pressure: 15kg/cm²
7. Wetted parts: SUS304
8. Weight: (approx.) 1.2 kg

Drill Hole






Test Board (Optional)

Material: SS41

Please weld test board with level instrument.
Without level dropping, level instrument can
be checked regularly if functions well.

Check list

Check if mechanical parts of level switch function well?
Check if float functions well?

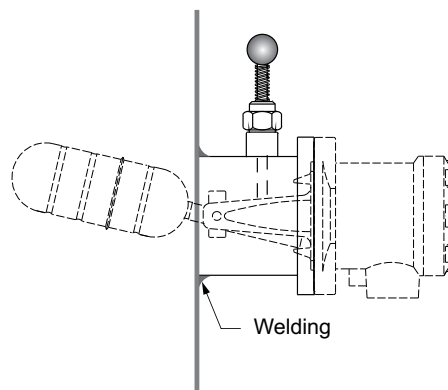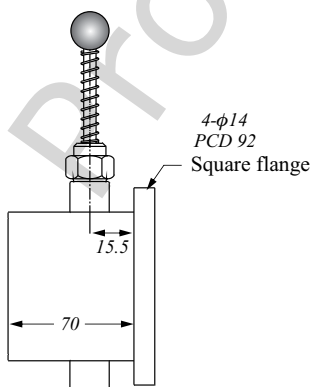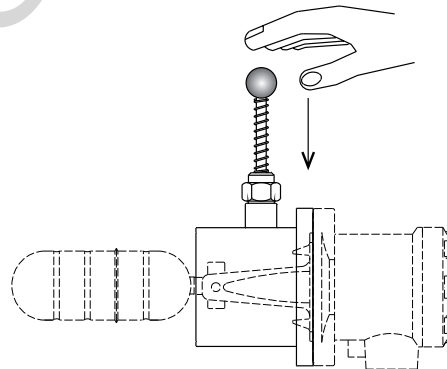



Process Center AB


Sidomonterade Nivåvakter Serie FF

www.processcenter.se

IMPORTANCE FOR INSTALLATION

1. SUS304/SUS316 materials are not available for corrosive application.
2. The cable duct(s) must face downward to prevent moisture seeping in.
3. The float and extension rod must be inserted into the bin completely.
4. Check the liquid's S.G. level before installation.
5. The mounting hole must be larger than the external diameter of the float. (Please refer to p2)
6. Don't mount the devices near the bin's inlet or outlet.

Typical Positioning

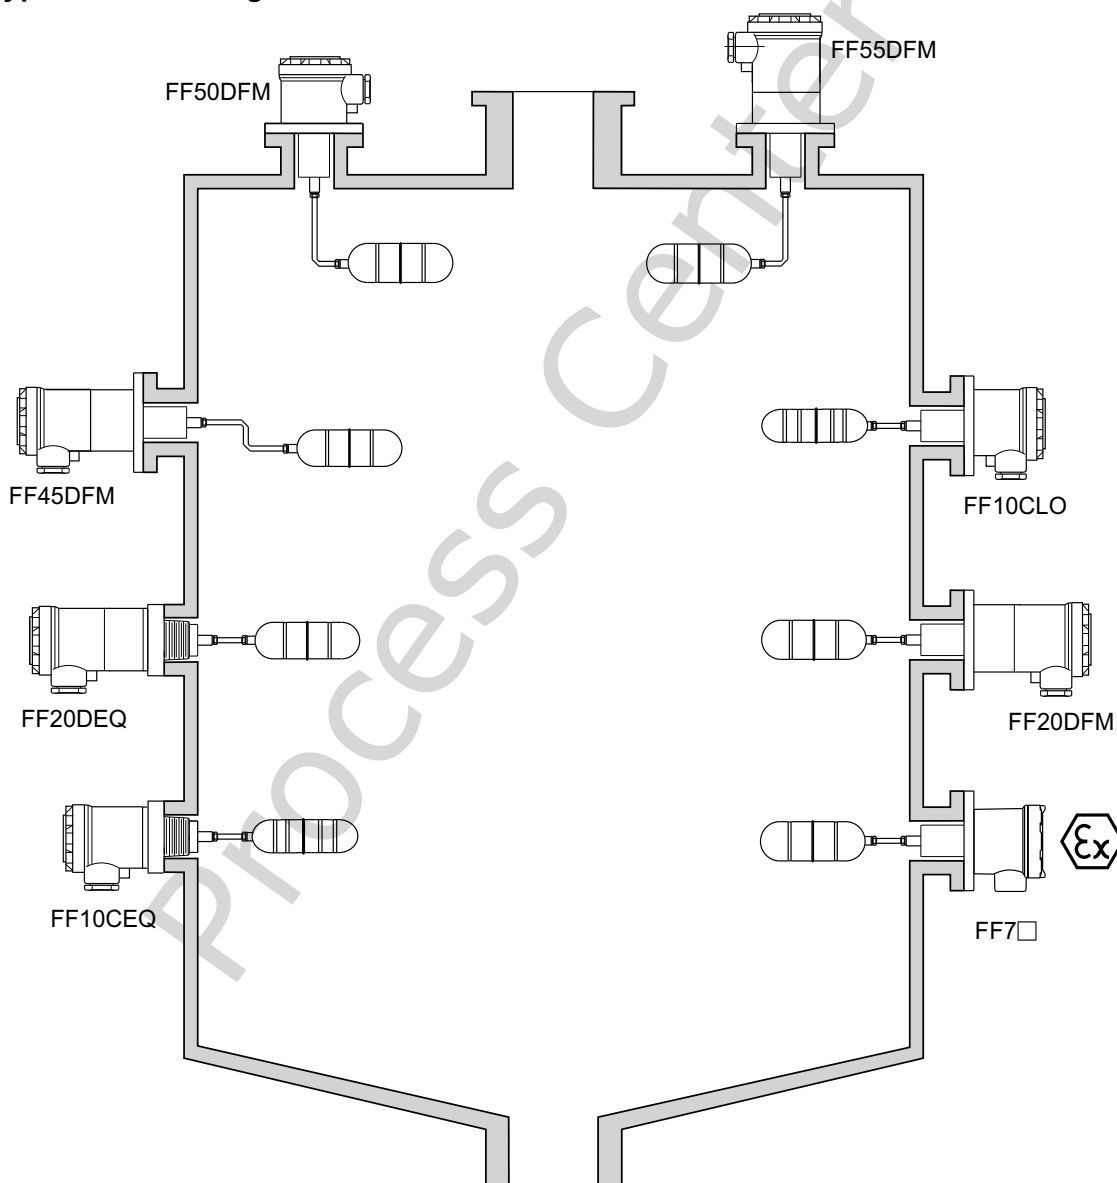



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

ORDER INFORMATION

Order No. FF **1** **0** **C** **E** **M** **(S)** **(T)**


ORDER NO.

10/12: Standard	55: Vertical High Temp.
15: Mini	62/66: High Temp Radiator
20/26: High Temp.	80: Anti-acid/alkaline
40: Double Angle Standard	81: Without Housing
45: Double Angle High Temp.	Only FF81E
50: Vertical Standard	90/96: Square Flange

※ Mini type only available float type(C.G.H)

FLOAT TYPE

B: $\phi 75 \times 120$ (Operation Pressure 10kg/cm² S.G. 0.25)
 C: $\phi 41 \times 150$ (Operation Pressure 15kg/cm² S.G. 0.65)
 D: $\phi 50 \times 150$ (Operation Pressure 30kg/cm² S.G. 0.55)
 G: $\phi 41 \times 125$ (Operation Pressure 15kg/cm² S.G. 0.7)
 H: $\phi 41 \times 100$ (Operation Pressure 15kg/cm² S.G. 0.8)

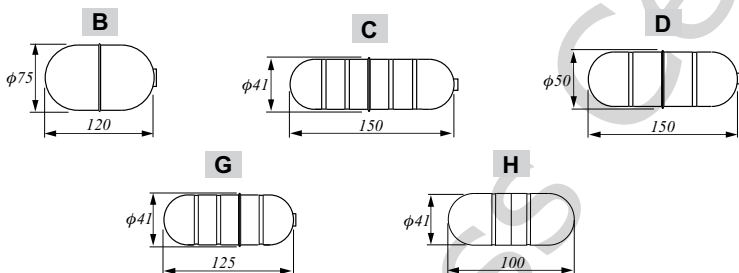

CONNECTING TYPE

E: 1-1/2" (40A)	M: 5 kg/cm ²	W: PN 10 (10Bar)
F: 2" (50A)	N: 10 kg/cm ²	X: PN 16 (16Bar)
G: 2-1/2" (65A)	O: 150 Lbs	Y: PN 25 (25Bar)
H: 3" (80A)	P: 300 Lbs	Z: PN 40 (40Bar)
I: 4" (100A)	Q: PT	S: Others
J: 5" (125A)	R: PF(G)	
K: 6" (150A)	T: BSP	
L: 92x92	U: NPT	

CUSTOM LENGTH(L) (UNIT: mm)

TEST BOARD

- ※ Total product length margin of error is ± 5 mm
- ※ Characteristics, specifications and dimensions are subject to change without notice.
- ※ Please contact your nearest distributor for further information.

Process Center AB
 Skogsbrynsvägen 8 C
 236 31 Höllviken
 040 452900 info@processcenter.se



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

NEPSI PROOF No.GYJ111213 Ex d IIC T3~T6
PTB PROOF No. 05 ATEX 1025 Ⓜ II 2G Ex d IIB T6~T4 Gb
Ⓜ II 2D Ex tb IIIC T85°C~T135°C
Db IP65

EXPLOSION PROOF


Order No. FF ☐ ☐ ☐ ☐

Connecting Type
(Refer to page 13)


Float Type

7 ☐: Explosion Proof (EX d IIC T3~T6)


► Order No. FF 70 CEQ

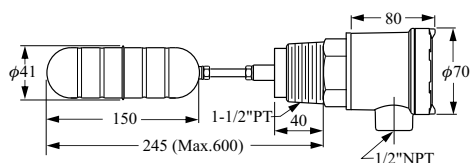


► Order No. FF 70 DFQ

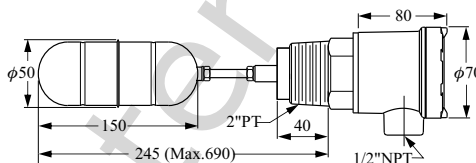


► Order No. FF 71 BHM

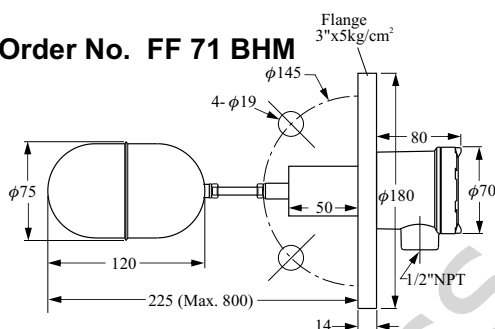


► Order No. FF 71 CEM

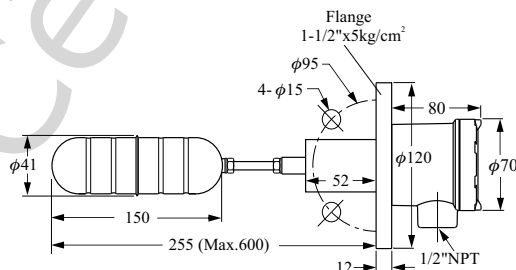


► Order No. FF 71 DFM

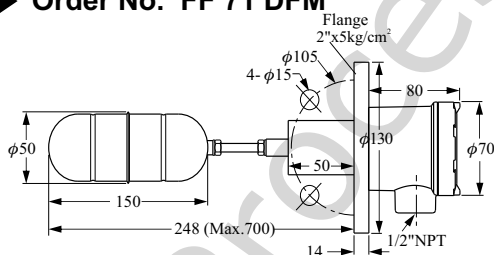


► Order No. FF 73 CLO

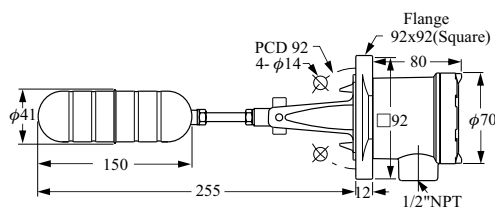

► Order No. FF 74 DFM

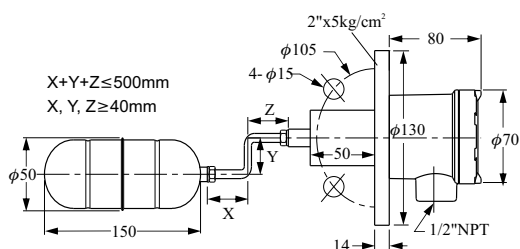

► Order No. FF 75 DFM

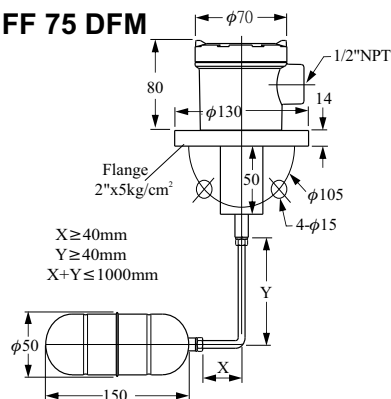

Process Center AB
Skogsbrynsvägen 8 C
236 31 Höllviken

040 452900 info@processcenter.se



Process Center AB

Sidomonterade Nivåvakter Serie FF

www.processcenter.se

NEPSI PROOF No.GYJ111213 Ex d IIC T3~T6
PTB PROOF No. 05 ATEX 1025 Ⓜ II 2G Ex d IIB T6~T4 Gb
Ⓜ II 2D Ex tb IIIC T85°C~T135°C
Db IP65

ORDER INFORMATION


Order No. FF **70** **C** **E** **M** **S** **T**

ORDER NO.

70: LF70 Explosion Proof
71: LF71 Explosion Proof
73: LF73 Explosion Proof
74: LF74 Explosion Proof
75: LF75 Explosion Proof

FLOAT TYPE

B: $\phi 75 \times 120$ (Operation Pressure 10kg/cm² S.G. 0.25)
C: $\phi 41 \times 150$ (Operation Pressure 15kg/cm² S.G. 0.65)
D: $\phi 50 \times 150$ (Operation Pressure 30kg/cm² S.G. 0.55)
G: $\phi 41 \times 125$ (Operation Pressure 15kg/cm² S.G. 0.7)
H: $\phi 41 \times 100$ (Operation Pressure 15kg/cm² S.G. 0.8)

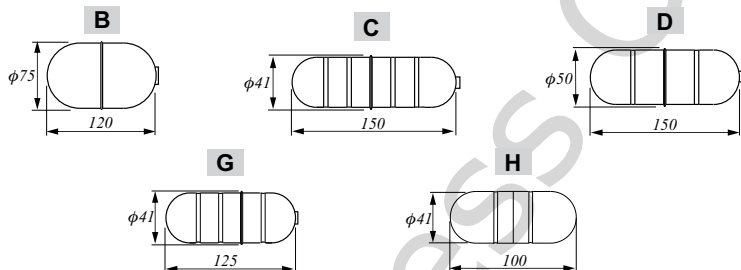

CONNECTING TYPE

E: 1-1/2" (40A)	M: 5 kg/cm ²	W: PN10 (10Bar)
F: 2" (50A)	N: 10kg/cm ²	X: PN16 (16Bar)
G: 2-1/2" (65A)	O: 150 Lbs	Y: PN25 (25Bar)
H: 3" (80A)	P: 300 Lbs	Z: PN40 (40Bar)
I: 4" (100A)	Q: PT	S: Others
J: 5" (125A)	R: PF(G)	
K: 6" (150A)	T: BSP	
L: 92x92	U: NPT	

CUSTOM LENGTH(L) (UNIT: mm)

TEST ACCESSORY

- ※ Total product length margin of error is ± 5 mm
- ※ Characteristics, specifications and dimensions are subject to change without notice.
- ※ Please contact your nearest distributor for further information.

Process Center AB
Skogsbrynsvägen 8 C
236 31 Höllviken
040 452900 info@processcenter.se